


▶ BEACON SO-Wd11




▶ Technical data: _____

Type	beacon
Supply voltage	12 V DC
Current consumption in the off state	0 mA
Current consumption at 12 V DC	<35 mA
Ingress protection	IP53D
Weight	~150 g
Dimensions	ø115x63 mm

▶ Product description: _____

- The SO-Wd11 beacon is destined for optical signalling by the set of LED diodes in burglar alarm systems.
- The SO-Wd11 beacon is intended for indoor applications.
- Selection one of three different flashing frequencies.
- Continuous lighting option.
- Red or orange colour of the shade.

▶ Connection diagram: _____

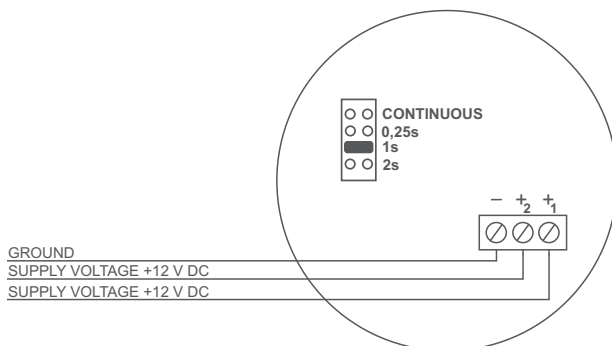

Jumper settings:	
CONTINUOUS	continuous light
0,25s	flash frequency 4 Hz
1s	flash frequency 1 Hz
2s	flash frequency 0.5 Hz