


# ▶ BEACON SO-Pd11




## ▶ Technical data: \_\_\_\_\_

Type	beacon
Supply voltage	16..32,5 V DC
Current consumption in the off state	0 mA
Current consumption at 24 V DC	<60 mA
Ingress Protection	IP53D
Weight	~150 g
Dimensions	ø115x63 mm
Cooperating products	PIP-3AN, OZ-40-2

## ▶ Product description: \_\_\_\_\_

- The beacon SO-Pd11 is destined for optical signalling by the set of LED diodes in fire alarm systems.
- The SO-Pd11 device is intended for indoor applications.
- 3 different flash frequencies.
- Possibility to turn on continuous lighting.

## ▶ Connection diagram: \_\_\_\_\_

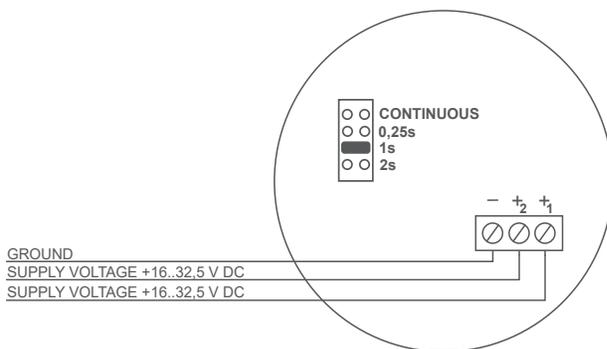

Jumper settings:	
CONTINUOUS	continuous light
0,25s	flash frequency 4Hz
1s	flash frequency 1Hz
2s	flash frequency 0,5Hz