

# ▶ SOUNDER SA-K6



## DOCUMENTS ISSUED BY CNBOP-PIB:

- CERTIFICATE CPR
- CERTIFICATE OF APPROVAL



## ▶ Technical data: \_\_\_\_\_


Type	sounder
Supply voltage	16-32,5 V DC
Current consumption in off state	0 mA
Current consumption in on state	<50 mA*
Power consumption in on state	<1,2 W*
Sound output	>100 dB*
Flash frequency	~1,5 Hz
Flash time	~333 ms
Time between flashes	~333 ms
Device category	not applicable
Device type	type A
Working temperature	-10°C ÷ +55°C
IP protection degree	IP21C
IK protection degree	not applicable
Conductor cross-section	2,5 mm <sup>2</sup>
Dimensions	ø115x70 mm
Weight	~184 g

\*for U<sub>z</sub>=24 V DC, fire service signal

## ▶ Product description: \_\_\_\_\_

- SA-K6 device is destined for acoustic signalling with optical - point signalling (flashing LED diode).
- This alarm device is intended for indoor applications in accordance with signal possibilities presented below.
- 4 sounds patterns.
- SA-K6 cooperates with WSD-1 audible signal switch.

## ▶ Connection diagram: \_\_\_\_\_

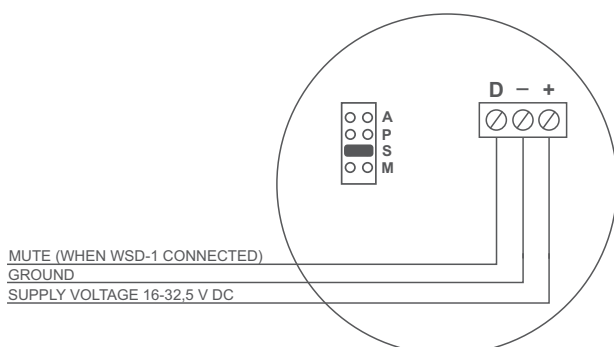

Jumper settings:	
A	Ambulance signal
P	Police signal
S	Fire service signal
M	ISO 8201