


## ▶ AUDIBLE SIGNAL SWITCH **WSD-1**



### ▶ **Product description:**

- The WSD-1 audible signal switch is destined for collaboration with the alarm devices type SA-K, SA-KN, SG-Pgw2, SAOZ-Pk and SGO-Pgz2.
- The switch turns off an acoustic signal coming from the above mentioned alarm devices but lives an optical signal.
- In SA-K devices type - an application of one WSD-1 switch allows for turning off only one alarm device.
- In SA-KN devices type - an application of one WSD-1 switch allows for turning off only one alarm device (WSD-1 in connection with "slave" device) or turning off devices network (WSD-1 in connection with "master" device).
- The WSD-1 audible signal switch is applied in fire alarm systems to make evacuation action easier.

### ▶ **Connection diagram:**

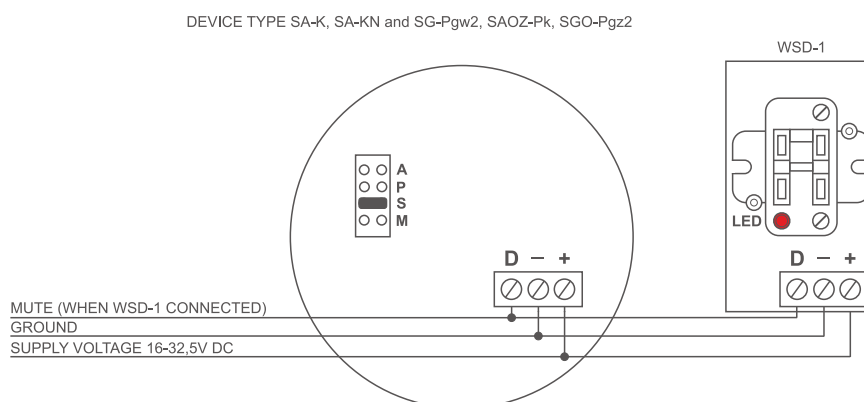

► **Technical data:**

---

Supply voltage	16..32,5V DC
Current consumption in the off-state	0mA
Current consumption at 24V DC	15mA
Ingress Protection	IP 40
Dimensions	80x65x50mm
Collaborative alarm device	series SA-K, SA-KN and SG-Pgw2, SAOZ-Pk, SGO-Pgz2

