

## ▶ OPTICAL ALARM DEVICE **SO-Wd12**




### ▶ **Product description:**

- The SO-Wd12 optical alarm device is destined for optical signalling by the set of LED diodes in burglar alarm systems.
- The device is intended for indoor applications.
- 15 various visual effects.
- Continuous lighting as optional.
- The shade of the SO-Wd12 alarm device is available in the red or orange colour.

### ▶ **Connection diagram:**

Table of possible optical signalling settings

No	Description	1234
1	Continuous lighting	1111
2	Intermittent signalling (1s interval)	1110
3	Intermittent signalling (0.5s interval)	1101
4	Intermittent signalling (0.25s interval)	1100
5	Flash signalling (stroboscope)	1011
6	Rotating signalling	1010
7	Intermittent rotating signalling	1001
8	Complementary rotating signalling	1000
9	Cross signalling	0111
10	Sequence signalling (3x intermittent signalling + 4x rotating signalling)	0110
11	Sequence signalling (5 x rotating signalling + flash signalling)	0101
12	Increasing signalling	0100
13	Increasing and decreasing signalling	0011
14	Flash and increasing signalling	0010
15	Pseudo-random signalling	0001
16	Demonstration program	0000

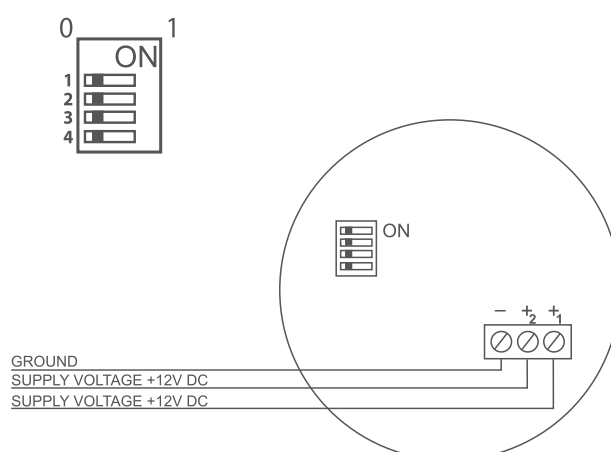

► **Technical data:**

---

Supply voltage	12V DC
Current consumption in the off-state	0mA
Current consumption at 12V DC	<150mA
Ingress protection	IP 53D
Dimensions	ø115x95mm

