


▶ ALARM DEVICE **SAO-Bz**



▶ **Product description:**

- The SAO-Bz outdoor alarm device is destined for acoustic and optical signalling in both outdoor and indoor alarm systems as well as in technical systems.
- The source of sound - two ceramic transducers.
- The alarm device enables the user to control the optical and acoustic signal independently.
- The device is equipped with anti-sabotage elements which give information about removing the alarm device off the surface and about removing the cover of the alarm device.

▶ **Connection diagram:**

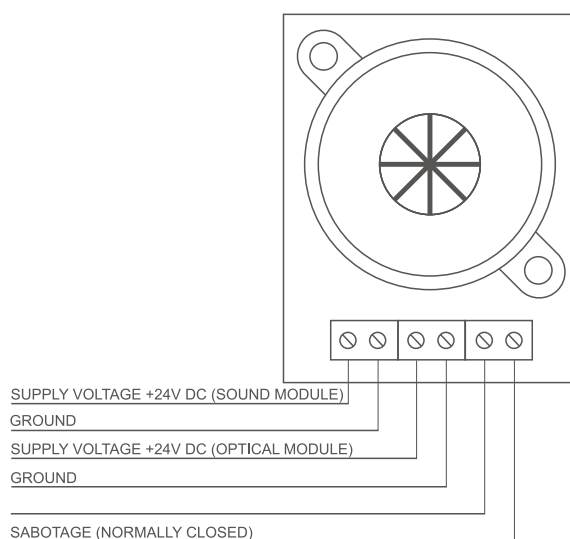

► **Technical data:**

Supply voltage	16..32,5V DC
Current consumption in the off-state	0mA
Current consumption	Acoustic part max 80mA@24V DC
Current consumption	Optical part max 15mA@24V DC
Sound output at 1m	>95dB
Ingress protection	IP 36C
Dimensions	155x142x70mm

